

## Irregular Shape Solution 异形屏

As an integrated LED display solution provider, M-SHINE, a strong technical and service team, always try our best to provide the most suitable solutions for all customers. We have various shapes and sizes of ready-made solutions, will offer more professional and efficient service for all of your irregular projects .



Cloud display



Letter display




Watch circle display



Ribbon display



DJ booth

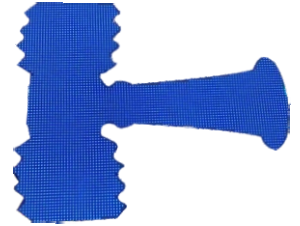

Hammer-shaped display



Wave LED poster



Pentagram display



Diamond display



Sphere display



Cube LED display



Stage diamond display

## 公司简介 Company Profile

深圳市明兴光电子科技有限公司成立于2009年，注册资金人民币3000万元，占地面积8000多平方米，是一家集设计、研发、制造、方案解决于一体的国家级LED显示屏高新技术企业，产品涵盖室内外LED透明屏、LED格栅屏、LED创意异形屏、租赁屏及显示系统解决方案，是深圳市LED产业联合会会员单位。明兴光以“开拓新市场，创造新价值”为目标，致力于为国内外客户提供高附加值、高整合度、高可靠度的产品和解决方案。

明兴光生产的各种LED显示产品均已获得国家质检部门的合格检测报告，并获得了3C认证、CE、RoHs等各类产品认证。公司显示屏吊装安装设计、快速链接装置、防水设计、高透光率格栅屏设计等10个项目均已获得国家实用新型专利证书。明兴光以“LED显示系统方案专业提供商”为企业定位，努力为客户创造全新的价值。目前公司产品与服务网络已覆盖全国30多个省市地区，产品远销美国、加拿大、英国、欧盟、中东、俄罗斯等国家和地区。

我们真诚的欢迎各界人士来我司考察指导，洽谈业务。



以价值为导向 以质量求生存  
以团队谋发展

Shenzhen M-shine Electronic Technology Co.,Ltd, founded in 2009 with registered capital of 30 million Yuan, whole company covers more than 8000 square meters, is a high-tech enterprise specialized in R&D, manufacturing, marketing and service of LED products, whose product line covers indoor/outdoor transparent LED display, LED outdoor mesh, irregular shape LED, rental LED etc.

M-Shine owns a cross-functional team with rich experience of LED display technology researches, manufacturing management, solution design and after-sale services, to provide customers high-value products and reliable services, such as commercial advertising monitor system, remote display control system, live broadcast display system, auto brightness adjusting display system, wireless control display system etc. Meanwhile, various of M-shine products have obtained certificates of 3C FCC CE and ROHS etc, and numerous designs have received Chinese National utility model patents, including hoisting techniques of LED display, quick cabinet connecting locks, waterproof design, high luminousness LED curtain, etc.

Position as "professional LED display solution provider", M-shine strive to create a brand-new value for clients, now our products have been distributed to more than 30 domestic provinces and export world-wide like USA, Canada, UK, EU, Middle East, Russia and so on, well-credit by the market, M-Shine is here, welcome client's visiting at any time .

深圳市明兴光电子科技有限公司  
SHENZHEN M-SHINE ELECTRONIC TECHNOLOGY CO.,LTD

地址: 深圳市宝安区石岩街道洲石路49号凯欣达科技园  
电话: 86-755-3681 6888  
传真: 86-755-3681 6038  
邮箱: hmj@mxgled.com  
网址(中文): www.mxgled.com  
ADD: KaiXinDa Industrial Park, 49 ZhouShi Road, Shenzhen China  
Tel: 86-755-3681 6888  
Fax: 86-755-3681 6038  
Email: export01@mxgled.com  
Website(En): www.m-shineled.com



M-Shine  
Slim . Light . Convenient  
明兴光

LED显示产品细分专家  
SPECIAL LED DISPLAY  
SOLUTION PROVIDER




www.m-shineled.com




微信扫码关注明兴光

深圳市明兴光电子科技有限公司  
SHENZHEN M-SHINE ELECTRONIC TECHNOLOGY CO.,LTD

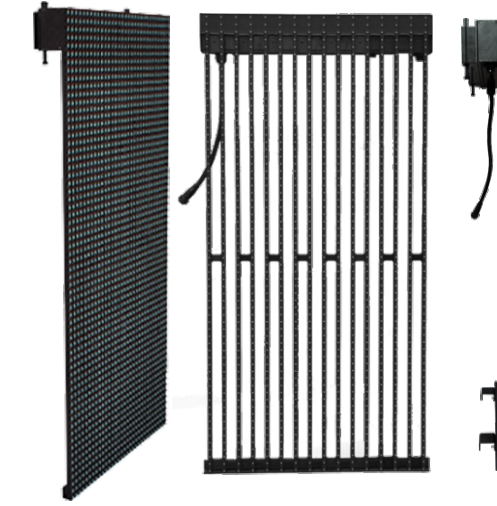

Galaxy Series 银河系列  
- Outdoor Fixed Mesh 户外格栅屏

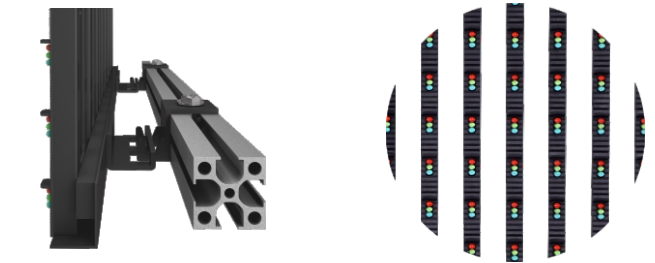

### Features产品特点:



- **Front & back service**  
前后维护  
Patented fast lock save time and labor cost;
- **Super light weight**  
超轻设计  
60-80% lighter than traditional screen;
- **Energy-saving**  
节能显著  
Better heat-dissipation as the see-through and aluminum structure design;
- **Certifications**  
CCC, CE, FCC, ROHS等各类产品认证  
CCC, CE, FCC, ROHS etc.

### Product Parameters 产品参数

Product Model	Pixel Density (dot/m <sup>2</sup> )	LED	Brightness (cd/m <sup>2</sup> )	Driving Method	Maintenance Method	Transparency	Weight (kg/m <sup>2</sup> )	Max.Power (w/m <sup>2</sup> )
P12.5*8.33	9600	SMD2727	≧ 6000	Static state	Front & back	26%	15	800
P15.625	4096	SMD2727 DIP346	≧ 5000 ≧ 9000	Static state	Front & back	43% 38%	15	800 400
P16.67	3600	DIP346	6000-9000	Static state	Front & back	32%	14	400
P20	2500	DIP346	6000-8000	Static state	Front & back	50%	14	400
P25	1600	DIP346	6000-8000	Static state	Front & back	60%	13	300
P31.25	1024	DIP346	≧ 6000	Static state	Front & back	68%	12	300
P15.625*31.25	2048	DIP346	6000-8000	Static state	Front & back	68%	13	400
P50	400	DIP346	≧ 5000	Static state	/	70%	12	300



Crystal Series 水晶系列透明屏  
—Outdoor Fixed/Rental  
户外固装/租赁

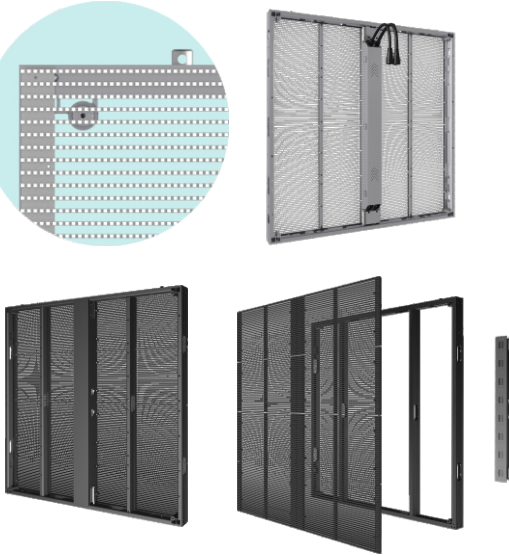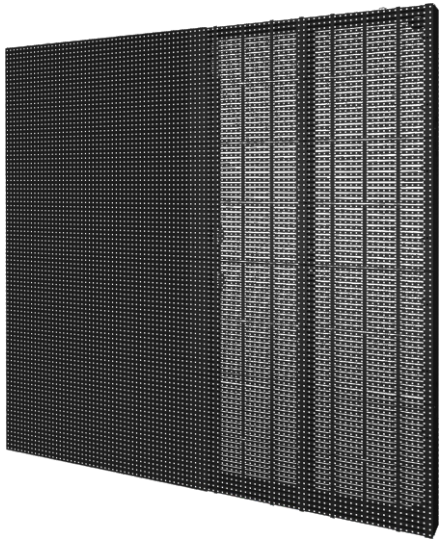

Features 产品特点:

- **Transparent & Non-transparent**  
一屏两用, 通透&非通透  
Via mask, screen can be switched between transparent and non-transparent.
- **High transparency, waterproof performance upgrade**  
高通透率, 防风防尘, 耐高低温, 散热效果极佳  
Anti-UV, extreme low (-40°C)& high temperature (+120°C) resistance, typhoon resistance.
- **Super slim & light**  
超轻、超薄  
82mm thickness & 16kg/sqm, greatly reduce the structure load .
- **Exclusive design on outdoor waterproof**  
纯户外全防水设计

Product Parameters 产品参数

Product Model	Pixel Pitch (mm)	Pixel Density (dots/m²)	Transparency	Brightness (cd/m²)	Driving Method	Cabinet Size (mm)	Maintenance Method	Weight (kg/m²)	Max Power (w/m²)
Front-emitting	P3.9*7.8	32768	45%	≧5000 ≧3000	1/8	1000×1000 1000X500	Front / back	16	1000 800
	P7.8*7.8	16384	45%	≧5000 ≧2500	1/4	1000×1000 1000X500	Front / back	16	1000 800
	P5.2*10.4	18432	50%	≧5500 ≧2500	1/4	1000×1000 1000X500	Front / back	14	800 600
	P10.4*10.4	9216	50%	≧5500 ≧2500	1/2	1000×1000 1000X500	Front / back	14	800 600

UT Series UT系列  
—Indoor Fixed/ Rental  
户内固装/租赁




Features 产品特点:

- **Super slim & light weight**  
超薄、超轻  
Thickness 44mm, 25kg/㎡ .
- **Multiple installation way**  
多种安装方式  
Lighter weight, can be attached to the wall installation, lifting, steel frame installation.
- **High refresh rate & high contrast and low brightness & high gray**  
高刷、高对比, 低亮、高灰阶  
Contrast ratio up to 5000:1, makes the picture more delicate, clearer and brighter.
- **Angle seamless splicing**  
角度无缝拼接  
Customized cabinet, and support angle splicing.

Product Parameters 产品参数


Product Model	Pixel Pitch (mm)	LED Lamp	Driving Mode	Brightness (cd/m²)	Module Size (mm)	Cabinet Resolution (px*px)	Weight (kg/m²)	Max Power (w/m²)	Viewing Angle
Indoor fine pitch	P1.25	1010	1/64	600	320x160	256x125	25	600	H120, V160
	P1.53	1010	1/52	600	320x160	208x104	25	600	H120, V160
	P1.66	1010	1/48	600	320x160	196x96	25	600	H120, V160
	P1.86	1515	1/43	600	320x160	172x86	25	600	H120, V160
	P2.5	2121	1/32	600	320x160	128x64	25	600	H120, V160

Crystal Plus Series 水晶二代系列  
Customized Design(side-emitting)  
可任意裁剪(侧发光)

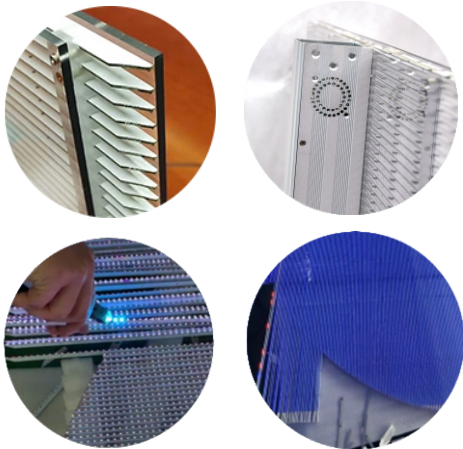

Features 产品特点:


- **Customized design on 2D/3D**  
定制化设计2D\3D各种造型  
Get different shapes by free cutting.
- **High transparency, high refresh rate, high brightness**  
高通透率,高刷,高亮  
87% transparency, 3840Hz, 5500cd brightness.
- **Light weight and super slim**  
超轻、超薄  
16kg/sqm, cabinet thickness 22mm.
- **No exposed cables, neat appearance**  
外观整洁,无外露线

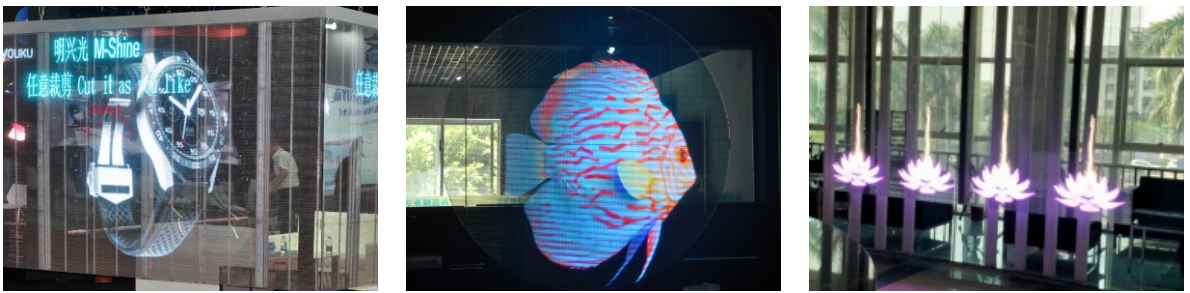

Product Parameters 产品参数

Product Model	Pixel Pitch (mm)	Pixel Density (dots/m²)	Transparency	Brightness (cd/m²)	Driving Method	Cabinet Size (mm)	Weight (kg/m²)	Max Power (w/m²)	Viewing Angle
Side -emitting	P3.91*7.81	32768	87%	≧5000 ≧1200	1/4	1000×500	14	1000 800	H120, V160
	P7.81*7.81	16384	85%	≧5000 ≧1200	1/4	1000×500	14	1000 800	H120, V160
	P5.2*10.42	9216	87%	≧5500 ≧2500	1/4	1000×500	14	1000 800	H120, V160
	P10.42*10.42	9216	87%	≧5500 ≧2500	1/2	1000×500	14	1000 800	H120, V160

Rock Series 磐石系列  
- Outdoor Fixed  
户外固装

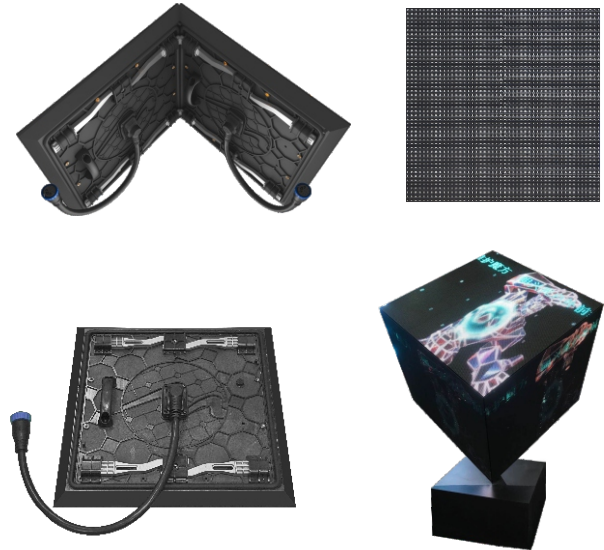

Features 产品特点:

- **Front & back service**  
前后双维护  
Fast front and back service, water-proof module .
- **Seamless splicing**  
任意角度无缝拼接  
Module with 45° bevel, easy to make various outdoor angle splice.
- **Super slim & light weight**  
超薄、超轻  
Aluminum cabinet thickness 92mm and 25kg/cabinet .
- **Energy saving**  
节能环保  
Common cathode 3.8V design, 30% less power consumption, 50% less heat generation.

Product Parameters 产品参数

Product Model ( mm )	Pixel Density (dot/m²)	Module Size (mm)	Brightness (cd/m²)	Driving Method	Maintenance Method	Cabinet Material	Max.Power (w/m²)
P3.91	65,538	250x250	≧6000	1/8	Front & back	Steel/ AL	900
P4.81	43,264	250x250	≧6000	1/7	Front & back	Steel/ AL	900
P5.33	35,156	320x320	≧6000	1/6	Front & back	Steel/ AL	820
P6.67	22,500	320x320	≧6000	1/6	Front & back	Steel/ AL	620
P8	15,625	320x320	≧6000	1/4	Front & back	Steel/ AL	620
P10	10,000	320x320	≧6500	1/2	Front & back	Steel/ AL	620